

# AGM2E 180 M 2

# IE2

# GAMAK

3-Phase 400 V (Δ) 50 Hz


Duty Type : S1

Degree of protection : IP 55 ( TEFC )

Insulation class : F ( 155 °C )

Temp rise : Class B ( 80K )

Mounting Design : B3

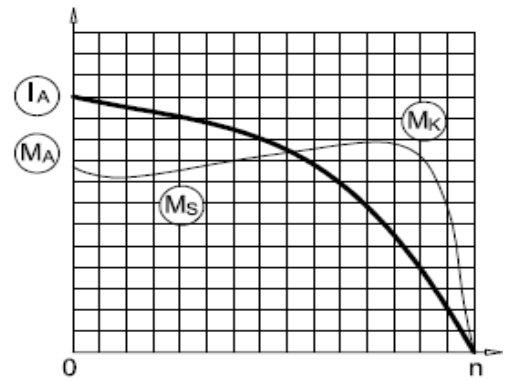

## ELECTRICAL DESIGN

## Direct On Line

Rated output (kW) : 22

Locked rotor Current – Ia (A) : 314

Ia / In : 8.2

Speed (rpm) : 2950

Locked rotor Torque – Ma (Nm) : 214

Ma / Mn : 3.0

Rated current (A) : 38.3

## Y / Δ Starting

Torque – Mn (Nm) : 71.2

Locked rotor Current – Ia (A) : 100

Ia / In : 2.6

Cos φ : 0.91

Locked rotor Torque – Ma (Nm) : 71

Ma / Mn : 1.0

Efficiency %	4/4	3/4	1/2
	91.3	91.3	90.8

Breakdown Torque – Mk (Nm) : 249

Mk / Mn : 3.5

Moment of inertia J (kgm)<sup>2</sup> : 0.066

## MECHANICAL DESIGN

Frame : Aluminium

End shields : Aluminium

Cooling fan : Plastic

Terminal box : Plastic

Cable gland : Pg 29

No of cable glands : 2

## Bearing Arrangement

Standard design

Drive End

6310 ZZ C3

Non Drive End

6210 ZZ C3

Reinforced design


NU 310 E

6310 C3

Noise Level (dB-A) : 70

Paint : RAL 7031- Grey

Approximate weight (kg) : 135

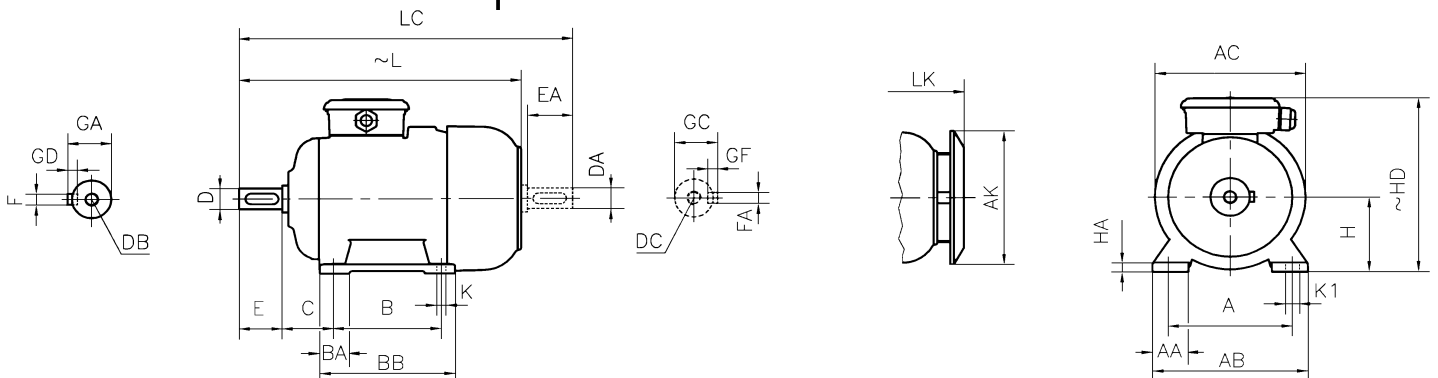

## DIMENSIONS

### Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6

H	HD ~	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L ~	LC	LK ~	C	E EA	DB DC	ØD ØDA	GA GC	FxGD FAXGF
180	421	24	279	68	354	348	303	15	19	241	279	57	95	320	657	773	714	121	110	M16	48	51.5	14X9

\* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.