




# 6 KUTUP / 1000 DEVİR

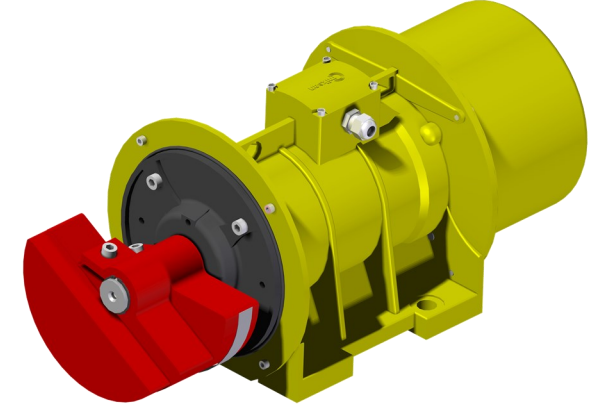

Şekil 1

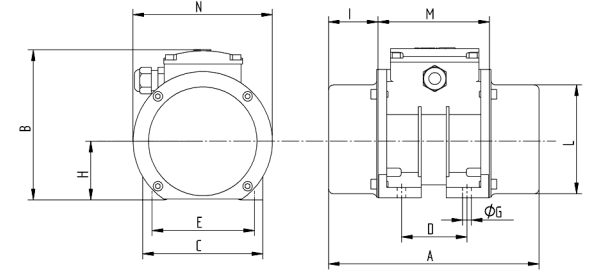

Şekil 2

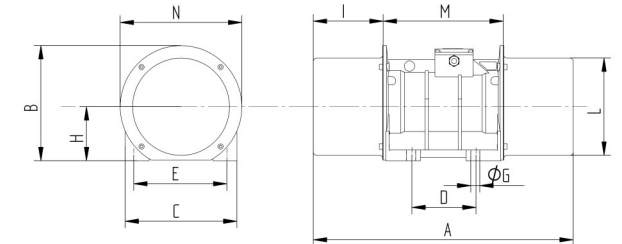

MEKANİK BİLGİLER					ELEKTRİKSEL BİLGİLER			
DEVİR	MODEL	Santrifüj Kuvveti		Statik Moment	Ağırlık	Nominal Gerilim	Maks. Akım	Maks.Giriş Gücü
50 Hz		KG	N	kgmm	KG	V	A	Kw
1000	VC 6-180	180	1766	161	17,7	230/400	1,12/0,65	0,30
	VC 6-250	250	2453	224	20,0	230/400	1,12/0,65	0,30
	VD 6-340	340	3335	304	30,0	230/400	1,38/0,80	0,43
	VD 6-500	500	4905	447	35,0	230/400	1,55/0,90	0,43
	VE 6-800	792	7770	709	62,0	230/400	2,95/1,70	0,65
	VE 6-1000	950	9320	850	64,5	230/400	3,63/2,10	0,75
	VE 6-1400	1350	13243	1208	73,0	230/400	3,81/2,20	0,90
	VG 6-1700	1660	16284	1485	91,0	230/400	4,15/2,40	1,10
	VG 6-2200	2190	21483	1959	98,0	230/400	4,84/2,80	1,40
	VH 6-2700	2683	26320	2400	119,0	230/400	7,10/4,10	1,95
	VH 6-3200	3175	31146	2840	126,0	230/400	8,31/4,80	2,10
	VK 6-3800	3800	37278	3399	188,0	230/400	12,30/7,10	3,20
VK 6-4700	4700	46107	4204	204,0	230/400	12,30/7,10	3,20	
VK 6-5200	5200	51012	4652	225,0	230/400	12,30/7,10	3,20	

## ÖLÇÜLER (mm)

MODEL	A	B	C	D	E	ØGx4	H	I	L	M	N	Kablo Girişi	Şekil No
VC 6-180	306	196	172	95	140	13	86	77	151	152	191	M20 x 1.5	1
VC 6-250	331	196	172	95	140	13	86	89,5	151	152	191	M20 x 1.5	1
VD 6-340	368	235	210	120	170	17	109	89	188	190	230	M20 x 1.5	1
VD 6-500	416	235	210	120	170	17	109	113	188	190	230	M20 x 1.5	1
VE 6-800	520	253	235	140	190	17	116	131	212	259	274	M20 x 1.5	2
VE 6-1000	520	253	235	140	190	17	116	131	212	259	274	M20 x 1.5	2
VE 6-1400	578	253	235	140	190	17	116	160	212	259	274	M20 x 1.5	2
VG 6-1700	628	277	270	155	225	22	130	169	234	290	294	M20 x 1.5	2
VG 6-2200	628	277	270	155	225	22	130	169	234	290	294	M20 x 1.5	2
VH 6-2700	604	334	310	155	255	23,5	160	147	292	310	330	M25 x 1.5	2
VH 6-3200	644	334	310	155	255	23,5	160	167	292	310	330	M25 x 1.5	2
VK 6-3800	702	355	340	180	280	26x4	170	186	310	330	327	M25 x 1.5	2
VK 6-4700	792	355	340	180	280	26x4	170	231	310	330	327	M25 x 1.5	2
VK 6-5200	792	355	340	180	280	26x4	170	231	310	330	327	M25 x 1.5	2