




8 KUTUP / 750 DEVİR

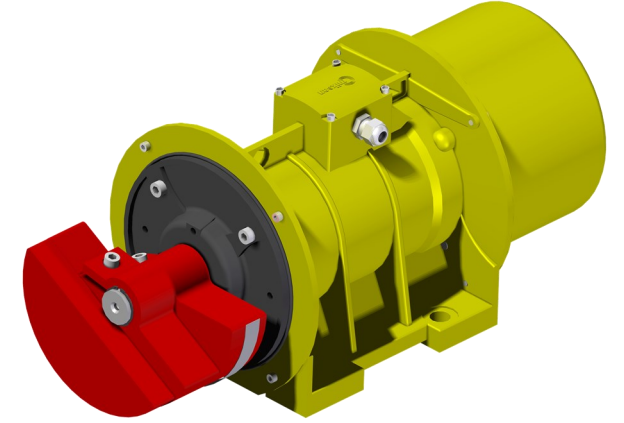

Şekil 1

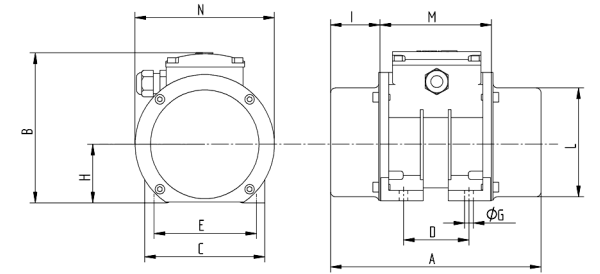

Şekil 2

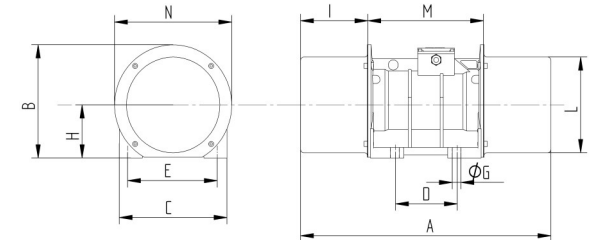

MEKANİK BİLGİLER						ELEKTRİKSEL BİLGİLER		
DEVİR	MODEL	Santrifüj Kuvveti		Statik Moment	Ağırlık	Nominal Gerilim	Maks. Akım	Maks. Giriş Gücü
50 Hz		KG	N	kgmm	KG	V	A	Kw
750	VD 8-200	195	1913	303	28,0	230/400	1,38/0,80	0,43
	VD 8-300	290	2845	446	33,0	230/400	1,55/0,90	0,43
	VE 8-520	510	5003	848	64,5	230/400	2,68/1,55	0,5
	VE 8-780	765	7505	1205	73,0	230/400	2,77/1,60	0,55
	VG 8-1000	1000	9810	1483	92,0	230/400	3,98/2,30	0,95
	VG 8-1200	1200	11772	1956	99,0	230/400	4,67/2,70	1,1
	VH 8-1500	1500	14715	2402	119,0	230/400	6,92/2,70	1,5
	VK 8-2200	2200	21580	3421	188,0	230/400	12,30/7,10	2,5
	VK 8-2650	2650	26000	4206	204,0	230/400	12,30/7,10	2,5

DIMENSIONS (mm)

MODEL	A	B	C	D	E	ØGx4	H	I	L	M	N	Kablo Girişi	Şekil no
VD 8-200	368	235	210	120	170	17	109	89	188	190	230	M20 x 1.5	1
VD 8-300	416	235	210	120	170	17	109	113	188	190	230	M20 x 1.5	1
VE 8-520	520	253	235	140	190	17	116	131	212	259	274	M20 x 1.5	2
VE 8-780	578	253	235	140	190	17	116	160	212	259	274	M20 x 1.5	2
VG 8-1000	628	277	270	155	225	22	130	169	234	290	294	M20 x 1.5	2
VG 8-1200	628	277	270	155	225	22	130	169	234	290	294	M20 x 1.5	2
VH 8-1500	604	335	310	155	255	23,5	160	147	290	310	333	M25 x 1.5	2
VK 8-2200	701	355	340	180	280	26	170	185,5	310	330	327	M25 x 1.5	2
VK 8-2650	701	355	340	180	280	26	170	185,5	310	330	327	M25 x 1.5	2